


# DEK08


Roof-mount air conditioners

COOLING CAPACITY



820 W




## Performance

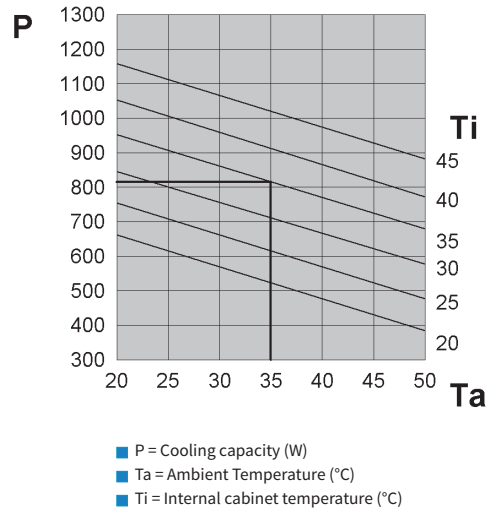

## Dimensions

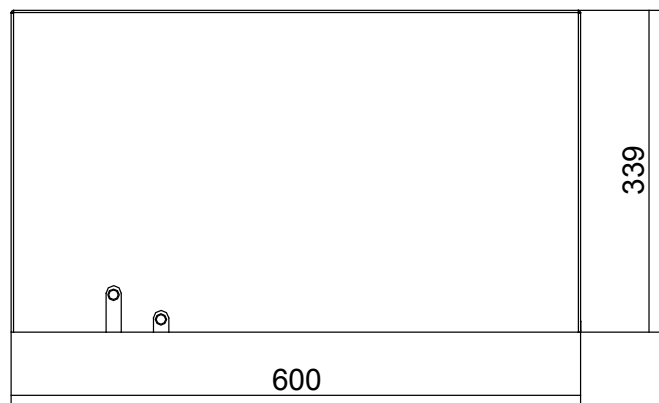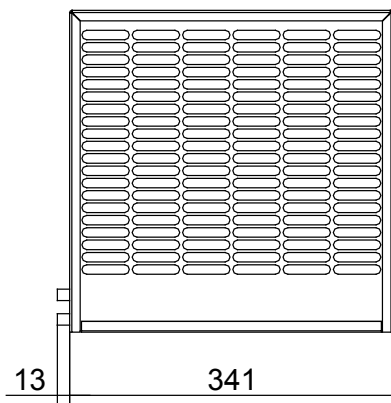

Features	UoM	DEK08BT0B	DEK08BTUB	DEK08CT0B	DEK08GT0B
Cooling capacity EN14511 - A35A35	W	820	820	820	820
Cooling capacity EN14511 - A35A50	W	680	680	680	680
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	341	341	341	341
Height	mm	339	339	339	339
Depth	mm	600	600	600	600
Max current	A	2.9	3.5	5.7	1.7
Inrush current	A	12	12	19	7
T Fuse	A	6	6	10	4
Power draw EN14511 - A35A35	W	510	520	520	520
Power draw EN14511 -A35A50	W	560	590	570	570
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.31	0.31	0.31	0.31
Max refrigeration circuit pressure	bar	25	28	25	25
External air fan capacity	m <sup>3</sup> /h	860	860	860	860
Cabinet air fan capacity	m <sup>3</sup> /h	570	570	570	570
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C			
External temperature range	°C	20-55*	20-55*	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	62	65	62	62
Weight	kg	23	23	24	24
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE  US	CE	CE

\* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	C15000173
Pack of 1 metal air filter	C15000174
Condensate level indicator	C16000140
External stainless-steel framework	
Coating in non-standard colour	