

DLK42-45-48

Ventilating towers

AIR FLOW RATE


2300-2530 - 3000-3370 - 4000-4520 m³/h





Features	UoM	DLK42BX0B	DLK45BX0B	DLK48BX0B
Fan air flow capacity	m ³ /h	2300 - 2530	3000 - 3370	4000 - 4520
Fan+tower air flow capacity	m ³ /h	2110 - 2390	2750 - 3180	3670 - 4270
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	230 1~ 50-60
Dimensions HxWxD	mm	272x637x637	272x637x637	272x637x637
Power draw	W	210 - 260	270 - 320	380 - 410
Max current	A	0.9 - 1.1	1.2 - 1.4	1.7 - 1.8
Overcurrent protection	-	Internal motor	Internal motor	Internal motor
Electrical connection	-	Cable	Cable	Cable
Operating cycle	-	100%	100%	100%
Temperature limits	°C	-20+60	-20+60	-20+60
IP rating EN60529	-	IP44	IP44	IP44
Noise level	dB (A)	62 - 64	72 - 74	71 - 74
DLK + 6 FIL35XN0B air flow capacity	m ³ /h	1920 - 2200	2520 - 2930	3340 - 3930
Air flow direction	-	Interior to exterior	Interior to exterior	Interior to exterior
Motor support	-	Bearings	Bearings	Bearings
Weight	kg	27	27	27
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE

Accessories	
Grille with filter 325x325 mm	FIL35XN0B
Pack of 10 fabric filters for FAN35	AAFFN35
0-60°C thermostat, normally open 10A	AAFTO12
5-60°C thermostat, change-over contact 10A	AAWTS10
Filter kit for IP54 ingress protection	C15X00000

Performance

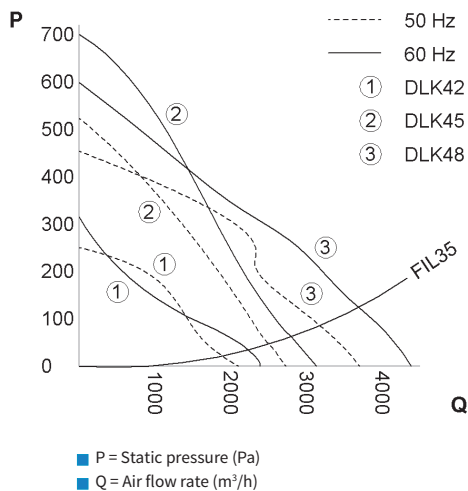

Dimensions

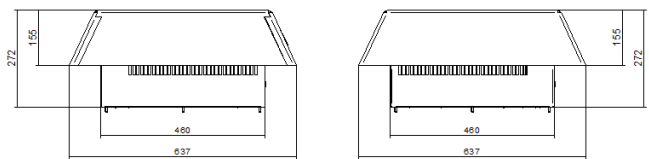

Drilling template

N.B.: The drilling templates are only approximate.
For any requirements, contact our technical/sales office.