

# EGO30

Door- or wall-mount air conditioners

## COOLING CAPACITY


2900 W



Features	UoM	EGO30BT1B	EGO30LT1B	EGO30NTVBX0000
Cooling capacity EN14511 - A35A35	W	2900	2900	2900
Cooling capacity EN14511 - A35A50	W	2250	2250	2250
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50-60	460 3~ 60
Width	mm	500	500	500
Height	mm	1270	1270	1270
Depth	mm	336	336	336
Max current	A	8.2	2.6	3.7
Inrush current	A	37.4	14	15
T Fuse	A	16	6	6
Power draw EN14511 - A35A35	W	1340	1220	1810
Power draw EN14511 - A35A50	W	1560	1440	2020
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.84	0.84	0.84
Max refrigeration circuit pressure	bar	25	25	25
External air fan capacity	m <sup>3</sup> /h	1450	1450	1450
Cabinet air fan capacity	m <sup>3</sup> /h	1450	1450	1450
Internal temperature range	°C	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C		
External temperature range	°C	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	70	70	70
Weight	kg	80	84	84
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE e-RA US

Accessories	
Pack of 5 fabric air filters	C15000183
Pack of 1 metal air filter	C15000185
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	

## Performance

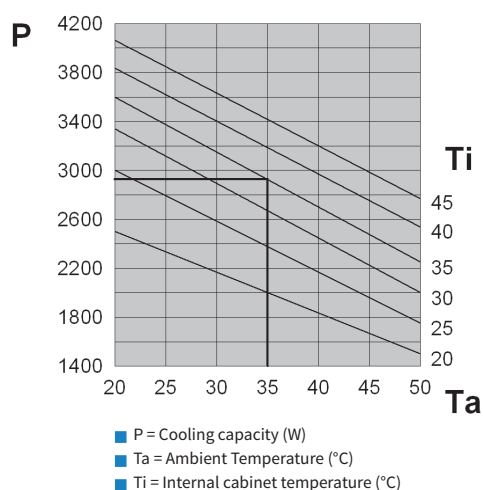

## Dimensions

