

# WID05 - 15ZX0X

Anti-condensation heaters

HEATING POWER

45 - 100 - 150 W




| Features                       | UoM    | WID05ZX0X                          | WID10ZX0X                          | WID15ZX0X                          |
|--------------------------------|--------|------------------------------------|------------------------------------|------------------------------------|
| Heating power*                 | W      | 45                                 | 100                                | 150                                |
| Power supply                   | V ~ Hz | 110-250 V<br>AC/DC                 | 110-250 V<br>AC/DC                 | 110-250 V<br>AC/DC                 |
| Dimensions HxWxD               | mm     | 109x70x50                          | 184x70x50                          | 264x70x50                          |
| Max current                    | A      | 3.5                                | 4.5                                | 9                                  |
| Heating element                | -      | self-regulated<br>PTC              | self-regulated<br>PTC              | self-regulated<br>PTC              |
| Electrical connection          | -      | 3 pole<br>Terminal board           | 3-pole<br>Terminal board           | 3-pole<br>Terminal board           |
| IEC protection class           | -      | I                                  | I                                  | I                                  |
| IP rating EN60529              | -      | IP20                               | IP20                               | IP20                               |
| Radiator                       | -      | Extruded alumin-<br>ium<br>profile | Extruded alumin-<br>ium<br>profile | Extruded alumin-<br>ium<br>profile |
| Clip installation for DIN rail | mm     | 35                                 | 35                                 | 35                                 |
| Weight                         | kg     | 0.3<br>CE                          | 0.5<br>CE                          | 0.7<br>CE                          |
| Conformity                     | -      |                                    |                                    |                                    |

## Accessories

|  |         |
|--|---------|
| Thermostat 0-60°C,<br>normally closed, 10A       | AAWTC10 |
| Thermostat 10-60°C,<br>change-over contact, 10A  | AAWTS10 |
| Humidistat, RH 35-95%<br>change-over contact, 5A | AAWHS10 |

\* At 20 °C ambient temperature

## Dimensions

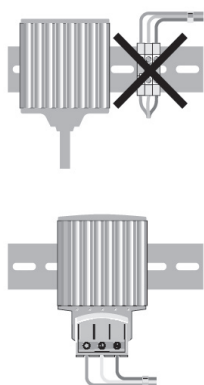

Facilitated installation with  
quick-connection terminals

| W mm      |     |
|-----------|-----|
| WID05ZX0X | 65  |
| WID10ZX0X | 140 |
| WID15ZX0X | 220 |

