

Blizzard 50 L 20W 100-240V

DIN rail mount PTC heating element

(natural convection)

- Features:
- Effectivel natural convection heating
 - Compact and powerful design
 - Self regulating, highest power at low ambient
 - Finger-guard (Ryton PPS) with integrated terminal block
 - Stainless steel 35mm DIN rail clip
 - UL approved components pending full approval.





Specifications:	
Marking (on element)	ΩDBK HPG 1/14 60X40 100-240V II date code
Power Output (10°C)	20W
Voltage (VAC)	100 - 240 VAC
Ir	≤1.2A
Dimensions L mm [in]	97.5mm [3.84"]
Protection Type	IP20
Terminal Block	UL94V-0 12-24AWG

Application Notes:

Optimised for Low Inrush Current
 UL94V-0 heater guard, does not exceed 74°C (165°F)
 For optimum performance mount vertically
 Other voltage / power output options upon request

DBK sample reference number: VS06406

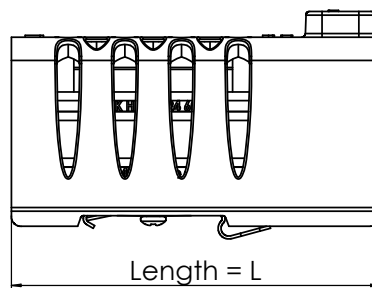

1010/200612

