

Blizzard 200 H 60W 100-240V


DIN rail mount PTC heating element

(natural convection)

- Features:
- Effectivel natural convection heating
 - Compact and powerful design
 - Self regulating, highest power at low ambient
 - Finger-guard (Ryton PPS) with integrated terminal block
 - Stainless steel 35mm DIN rail clip
 - UL approved components pending full approval.



Specifications:	
Marking (on element)	ΩDBK HPG 3/22 120X40 100-240V II date code
Power Output (10°C)	60W
Voltage (VAC)	100 - 240 VAC
Ir	≤6.0A
Dimensions L mm [in]	157.5mm [6.21"]
Protection Type	IP20
Terminal Block	UL94V-0 12-24AWG

DBK sample reference number: VS06710

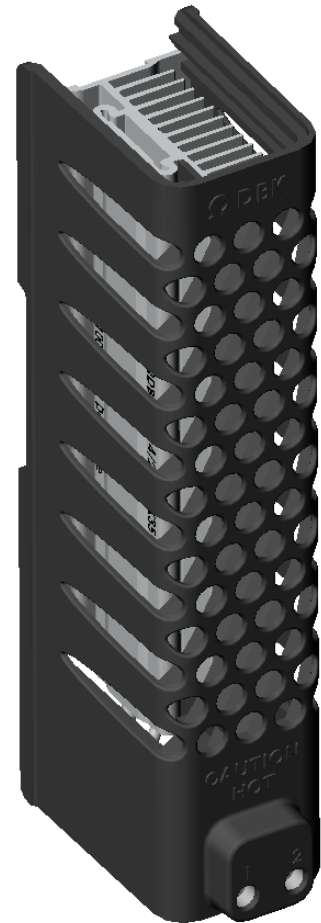

Application Notes:

- Optimised for Low Inrush Current
- UL94V-0 heater guard, does not exceed 105°C (221°F)
- For optimum performance mount vertically
- Other voltage / power output options upon request

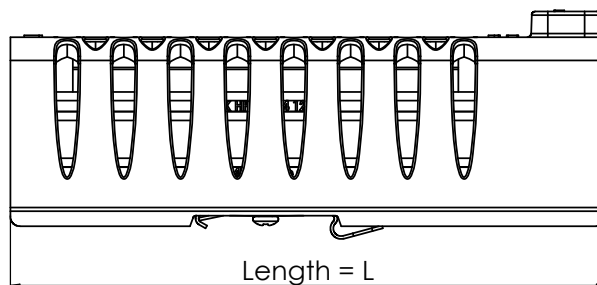

I010/200612

