

# EGO04

Door- or wall-mount air conditioners

## COOLING CAPACITY

380 W




Features	UoM	EGO04BT1B	EGO04BTVBX0000	EGO04CT1B
Cooling capacity EN14511 - A35A35	W	380	380	380
Cooling capacity EN14511 - A35A50	W	240	240	240
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60
Width	mm	285	285	285
Height	mm	460	460	460
Depth	mm	180	180	180+35**
Max current	A	1.6	1.7	3.2
Inrush current	A	6	6	11
T Fuse	A	4	4	6
Power draw EN14511 - A35A35	W	230	280	240
Power draw EN14511 -A35A50	W	260	330	270
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.16	0.16	0.16
Max refrigeration circuit pressure	bar	26	28	26
External air fan capacity	m <sup>3</sup> /h	280	280	280
Cabinet air fan capacity	m <sup>3</sup> /h	280	280	280
Internal temperature range	°C	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C		
External temperature range	°C	20-55*	20-55*	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	60	65	60
Weight	kg	17	17	18
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE e UL us	CE

### Accessories

Pack of 5 fabric air filters	AAEFP04
Pack of 1 metal air filter	AAEFM04
External stainless-steel framework	
Coating in non-standard colour	

\*\* for external autotransformer dimensions \* 50 °C at 60 Hz

## Performance

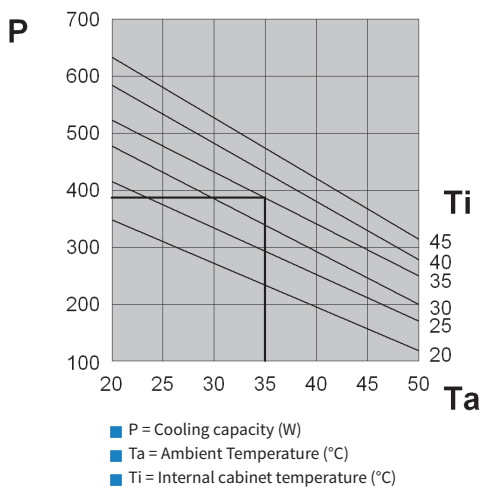

## Dimensions

