

EMO04

Wall-mount air conditioners for outdoor applications

COOLING CAPACITY

380 W



Accessories


Pack of 5 fabric air filters	AAEFP04
Pack of 1 metal air filter	AAEFM04
External stainless-steel framework	
Coating in non-standard colour	
48VDC evaporator fan	
Anti-tamper screw kit	
High temperature alarm	
Pressure alarms (low, high)	

Features	UoM	EMO04BM1B	EMO04CM1B
Cooling capacity EN14511 - A35A35	W	380	380
Cooling capacity EN14511 - A35A50	W	240	240
Power supply	V ~ Hz	230 1~ 50-60	115 1~ 50-60
Width	mm	300	300
Height	mm	572	572
Depth	mm	205	205+35***
Max current	A	1.6	3.2
Inrush current	A	6	11
T Fuse	A	4	6
Power draw EN14511 - A35A35	W	230	240
Power draw EN14511 - A35A50	W	260	270
Operating cycle	-	100%	100%
Electrical connection	-	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.16	0.16
Max refrigeration circuit pressure	bar	26	26
External air fan capacity	m ³ /h	280	280
Cabinet air fan capacity	m ³ /h	280	280
Internal temperature range	°C	+20 - +46	+20 - +46
Temperature regulation	-	Electromechanical thermostat, factory set to 35°C	
External temperature range	°C	-20 - +55**	-20 - +50
EN60529 ingress protection - cabinet side	-	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34*	IP34*
Noise level	dB (A)	60	60
Weight	kg	17	18
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

*** Due to external autotransformer dimensions ** 50 °C at 60 Hz

* IP54 rated exterior electrical connections

Performance

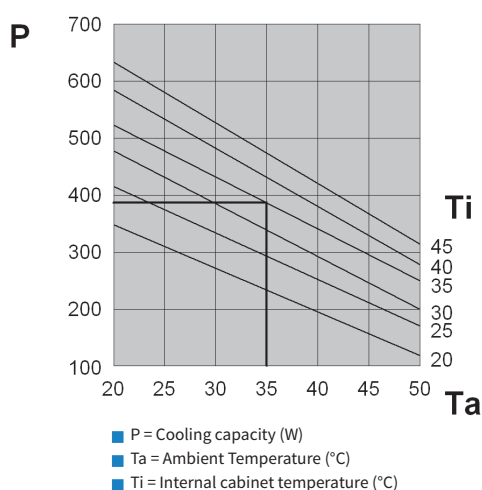

Dimensions

