



EG006

Door- or wall-mount air conditioners


COOLING CAPACITY

640 W

Performance

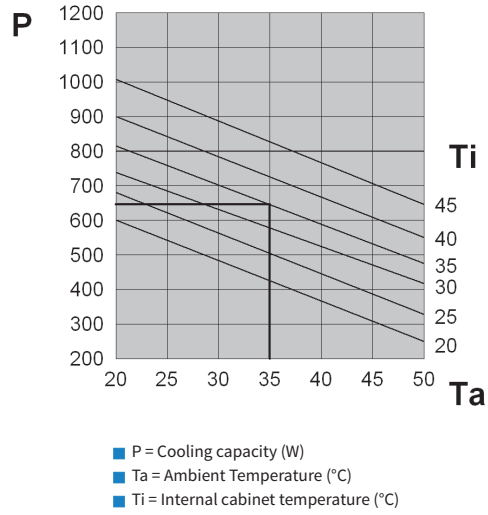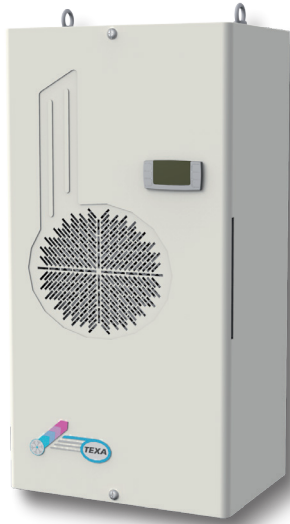

Dimensions

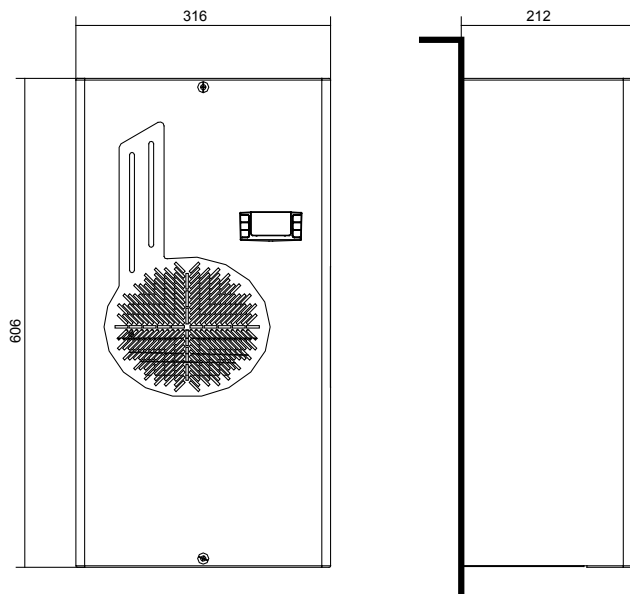

Features	UoM	EGO06BT1B	EGO06BTVBX0000	EGO06CT1B	EGO06GT1B
Cooling capacity EN14511 - A35A35	W	640	640	640	640
Cooling capacity EN14511 - A35A50	W	470	470	470	470
Power supply	V ~ Hz	230 1~ 50-60	230 1~ 50-60	115 1~ 50-60	400/440 2~ 50-60
Width	mm	316	316	316	316
Height	mm	606	606	606	606
Depth	mm	212	212	212+42**	212+58**
Max current	A	2.1	2.6	4.4	1.2
Inrush current	A	8.1	8.1	16	5
T Fuse	A	6	6	8	2
Power draw EN14511 - A35A35	W	380	400	390	390
Power draw EN14511 -A35A50	W	420	470	430	430
Operating cycle	-	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.26	0.23	0.26	0.26
Max refrigeration circuit pressure	bar	25	28	25	25
External air fan capacity	m ³ /h	570	570	570	570
Cabinet air fan capacity	m ³ /h	330	330	330	330
Internal temperature range	°C	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C			
External temperature range	°C	20-55*	20-55*	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65
Weight	kg	21	21	22	22
Colour	-	RAL 7035 embossed effect			
Conformity	-	CE	CE cRU _{us}	CE	CE

* 50 °C at 60 Hz

** for external autotransformer dimensions

Accessories	
Pack of 5 fabric air filters	AAEFP06
Pack of 1 metal air filter	AAEFM06
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	