

FLY20

Door- or wall-mount air conditioners

COOLING CAPACITY


2000 W



Features	UoM	FLY20BTUB	FLY20HTUB
Cooling capacity EN14511 - A35A35	W	2000	2000
Cooling capacity EN14511 - A35A50	W	1550	1550
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50/460 3~ 60
Width	mm	495	495
Height	mm	1697	1697
Depth	mm	195	195
Max current	A	6.5	3
Inrush current	A	27	10
T Fuse	A	11	6
Power draw EN14511 - A35A35	W	1290	1410
Power draw EN14511 - A35A50	W	1520	1620
Operating cycle	-	100%	100%
Electrical connection	-	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.53	0.56
Max refrigeration circuit pressure	bar	28	28
External air fan capacity	m ³ /h	1050	1050
Cabinet air fan capacity	m ³ /h	860	860
Internal temperature range	°C	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C	
External temperature range	°C	20-55	20-55
EN60529 ingress protection - cabinet side	-	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34
Noise level	dB (A)	67	67
Weight	kg	67	69
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE cRU _{us}	CE cRU _{us}

Accessories	
Pack of 5 fabric air filters	C15000181
Pack of 1 metal air filter	C15000182
External stainless-steel framework	
Coating in non-standard colour	

Performance

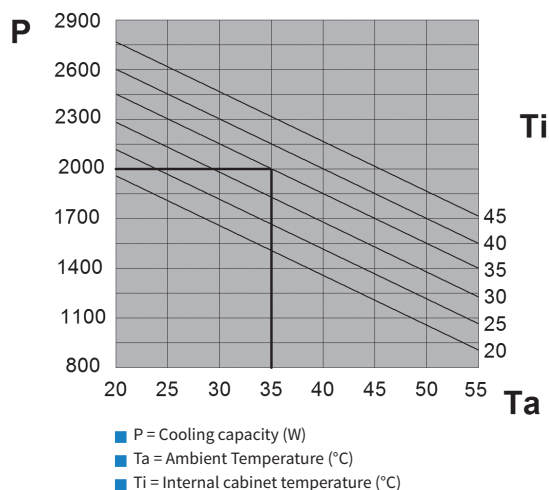

Dimensions

